

[HTTP://WWW.SOLARS-CHINA.COM](http://www.solars-china.com)

## 10W AMORPHOUS SILICON SOLAR MODULE


### ELECTRICAL CHARACTERISTICS

Cell Type	A-Si thin film solar module
Norminal Power	Pmax=10W
Open Circuit Voltage	Voc=26.7
Short Circuit Current	Isc=805mA
Voltage at Pmax	Vm=18V
Current at Pmax	Im=556mA
Temp.Coefficient/Pm	-(0.19±0.03)%/°C
Temp.Coefficient/Vm	-(0.34±0.04)%/°C
Temp.Coefficient/Im	(0.08±0.02)%/°C
STANDARD TEST CONDITIONS(STC:Irradiance 1000W/m <sup>2</sup> , Module temperature 25 degrees centigrade,AM 1.5 ) Power Tolerance: ±5%	


### RELIABILITY STATISTICS

Operating Temperature Range	-40°C to +90°C
Humidity & Temperature Test	85°C & 85% humidity 1000h
Junction Box	IP65 rated
Outstanding performance under low light irradiance	

### PERFORMANCE & IRRADIANCE CURVE

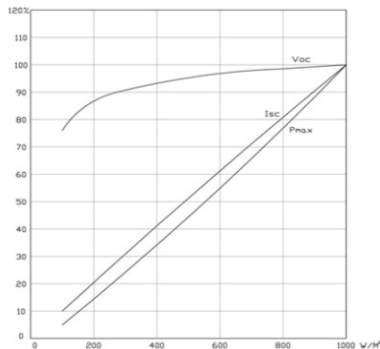

### DIMENSIONS

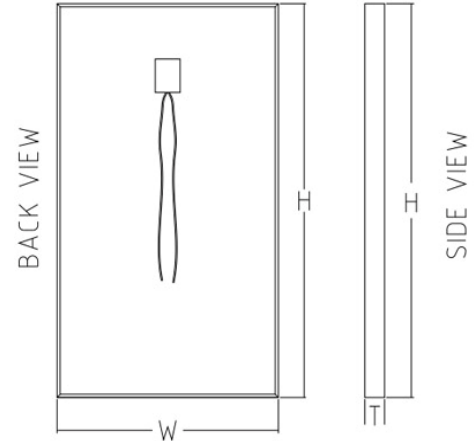

Item No: KS-A12W

**H W T**

640mm/25.2" 385mm/15.16" 26mm/1.02"

### MECHANICAL SPECIFICATIONS

Dmensions(H*W*T) as above	640*385*26mm
Weight	2.6kg
Front Cover	TCO Glass
Back Cover	PET
Frame	Sliver anodized aluminum
Output Lead Wire	Waterproof wire

### APPEARANCE SPECIFICATIONS

Delaminations or bubbles do not form a continuous path between any part of the electrical circuit and the edge of module
No any cracks, scratch or perforation in the glass or the backsheet

### PROPERTY FOR SYSTEM DESIGN

Series Fuse Rating	1A
Maximum System Voltage	600V
Module Life	90% output for 10 years, 80% for 20 years
Recommended applications for Off-grid systems	

THE TECHNICAL FILES PROVIDED BY CHINA SOLAR LTD

Design and specifications are subject to change without notice

Office Address:

N0.401,ZhongKang Pioneer Park,ZhongKang Road,  
Futian District, ShenZhen City,Guangdong Province,China

Factory Address:

Longxi Hi-tech Industrial Park, Longcheng Road, Longgang  
Town, ShenZhen City,Guangdong Province,China



CHINA SOLAR LTD

<http://www.solars-china.com>

<http://www.solars-china.net>

Tel: +86.755.8351 5659

Fax: +86.755.8271 6024

E-mail: [market@solars-china.com](mailto:market@solars-china.com)